

Field-Portable Ultrasonic Transit-Time Liquid Flow Meter

FEATURES

- One meter for a wide range of pipe sizes from 2 to 48 inches (50.8 to 1200 mm)
- Clamp-on, encapsulated IP 68 sensors require no pipe cuttings, no plant shutdown, and are hygienic measurements, leading to lower installation and labor costs
- Measurement is independent of fluid conductivity for a wider applicability compared to magnetic meters
- Programmable frequency output emulates turbine/propeller meters
- Accuracy +/- 1.0% of reading from 1.6 to 40 ft/s (0.49 to 12 m/s)
- Repeatability +/- 0.3% of reading
- Wide operating temperature range 32°F to 140°F (0°C to 60°C)
- 16 tactile keys with 12 dual-function keys for easy setup
- Configurable pulse and relay output
- 10 to 36 VDC at 1A power supply (sold separately)
- Daily, monthly, and yearly totalized flow
- Lightweight 1.5 lb (0.7 kg); PC/ABS IP 65 transmitter
- Modbus RTU, RS-485

InnovaSonic[®] 203



DESCRIPTION

Sierra's economical InnovaSonic[®] 203 ultrasonic liquid flow meter delivers highly accurate and repeatable flow measurement for liquids at an economical price. Ideal for pipes up to 48 inches (1200 mm) in diameter, the 203 promises accuracy to +/-1.0% of reading, repeatability of +/-0.3% of reading and a temperature range of 32°F to 140°F (0°C to 60°C).

The 203 offers low power consumption and high reliability at a very competitive price. An easy to read display and dual-function quick keys make setup quick and simple.

The 203 features a programmable frequency output, a relay output and a programmable current loop output. RS-485 and Modbus RTU are standard.

The InnovaSonic 203 is packaged in a lightweight polycarbonate IP 65 housing and includes clamp-on encapsulated IP 68 sensors that are easy to install and require no pipe cutting, reducing installation and labor costs.



PERFORMANCE SPECIFICATIONS

Accuracy

+/- 1.0% of reading from 1.6 to 40 ft/s (0.49 to 12 m/s)

Repeatability

+/- 0.3% of read

Pipe Size

2 to 48 inches (50.8 to 1200 mm)

OPERATING SPECIFICATIONS

Flow Range

1.6 to 40 ft/s (0.49 to 12 m/s)

Temperature

Ambient: 14°F to 122°F (-10°C to 50°C)

Operating: 32°F to 140°F (0°C to 60°C)

Power Supply

10 to 36 VDC at 1A (sold separately)

Output

Analog: 4 to 20 mA current loop (max load 750 Ω)

Pulse output: 0 to 9999 Hz, OCT, (min. and max. frequency is adjustable)

Relay output: SPST, max 1 Hz, (0.3 A@ 125VAC or 1A @ 30VDC)

Digital output: Modbus RTU, RS-485

Keypad

16 tactile keys with 12 dual-function keys for easy setup

Display

40 character, 2 line (20×2) lattice alphanumeric, backlit LCD

Humidity

Up to 99% RH (non-condensing)

PHYSICAL SPECIFICATIONS

Transmitter

NEMA 4X, IP 65 (PC/ABS)

Transducer

Encapsulated design IP 68

Standard cable length: 30 ft (9 m)

Maximum cable length: 100 ft (30 m)


Weight

Transmitter: approximately 1.5 lb. (.7 kg)


Transducer: approximately 0.9 lb. (0.4 kg)

DIMENSIONS


Front View 203 Transmitter

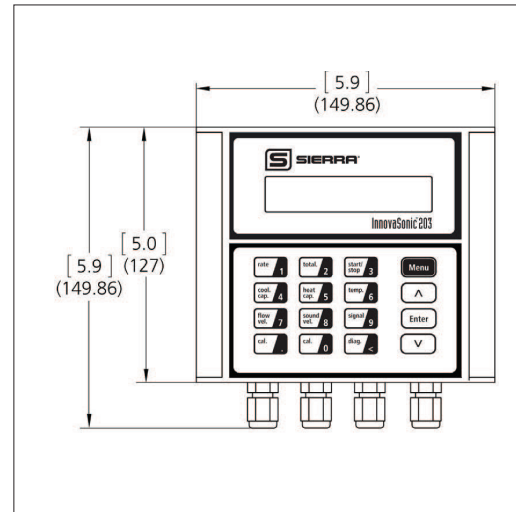

Side View 203 Transmitter


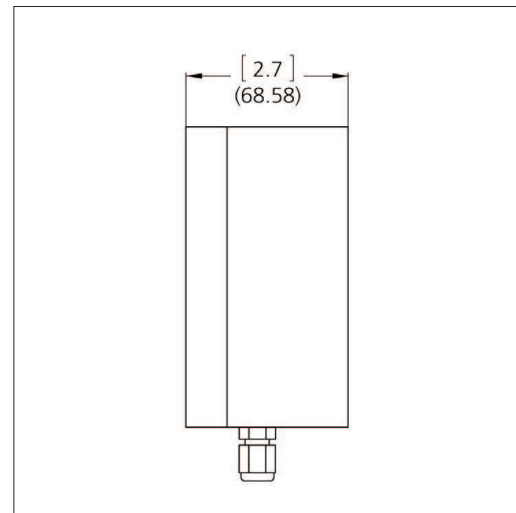


Front View Clamp-on Transducers


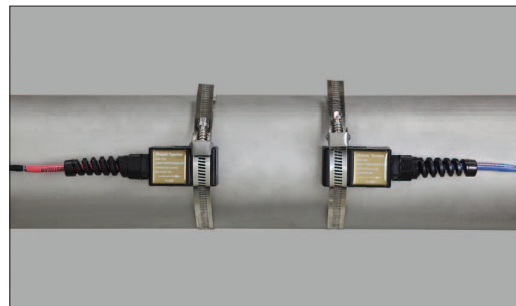


Front View 203 Transmitter

Front View 203 Transmitter

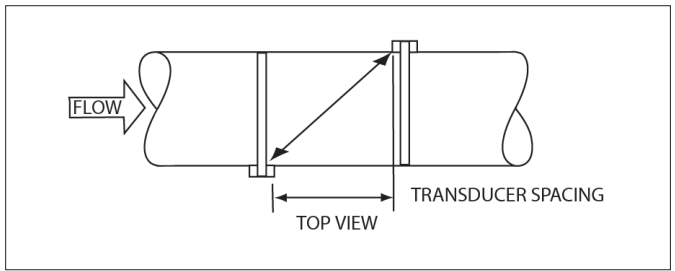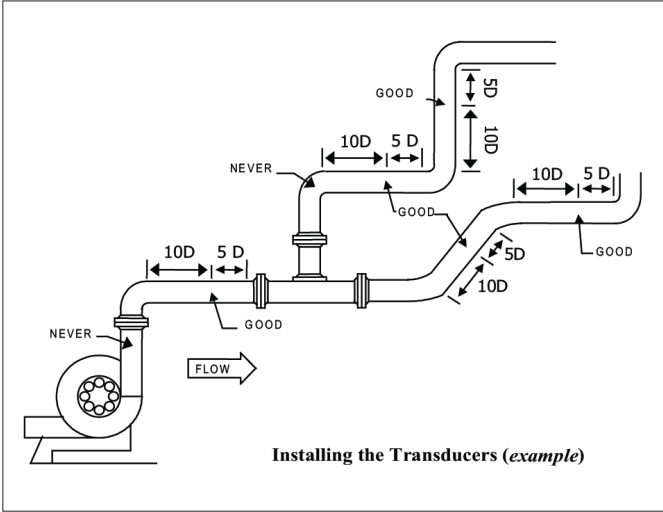

V Method Transducer Spacing

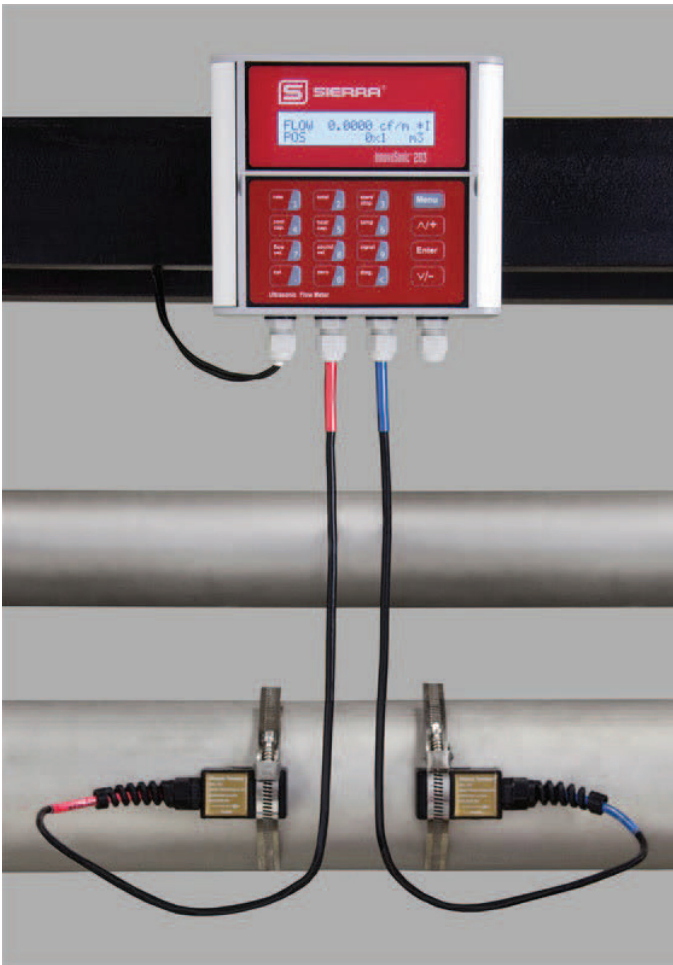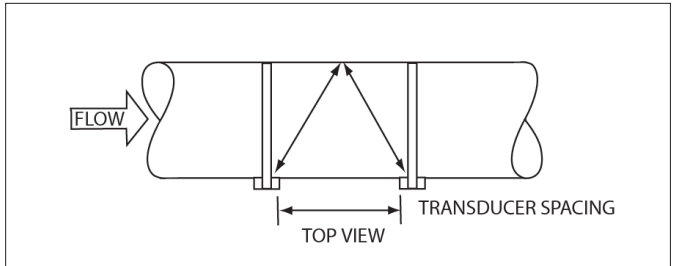

203	-		-			
Parent		1		2		Option

Instructions: To order a 203, please fill in each number block by selecting the codes from the corresponding features below.

Parent Number	
203	InnovaSonic 203® Economical ultrasonic transit time liquid flow meter; clamp-on transducers (CP) included in base price.
Feature 1: Outputs	
4	OCT, Relay, RS-485, 4 to 20 mA current loop (max load 750 Ω), Modbus RTU (all included)
Feature 2: Transducer	
CP	Clamp on transducers included. Installation kit includes two 2 inch x 44 inches (50 mm x 1115 mm) pipe straps suitable for 12 inch (304.8 mm) pipe max diameter pipe. Customer is responsible for connection to larger pipes.. Operating temperature 32°F to 140°F (0°C to 60°C). Standard 30 ft. (9 m). Note: Transducers included in base price.
Option: NIST Traceable Certificate	
NIST	5-point calibration certification traceable to NIST. Add two weeks to standard delivery.



Measurably Different™

Sierra Instruments

North America

20 Ryan Ranch Rd, Suite 109
Monterey, California 93940
+1.831.373.0200 • sierrainstruments.com

EMEA

Bijlmansweid 2
1934RE Egmond aan den Hoef • The Netherlands
+3172 5071400

Asia

Second Floor Building 5 • Senpu Industrial Park • 25 Hangdu
Road Hangtoun Town • Pu Dong New District • Shanghai, P.R.
China 201316 • +8621 5879 8521/22